


SCARLETT PACKER 90

NZ MANUFACTURED
QUALITY &
PERFORMANCE

- ▶ ROBUST CONSTRUCTION
- ▶ SIMPLE TO OPERATE
- ▶ ENERGY EFFICIENT TECHNOLOGY

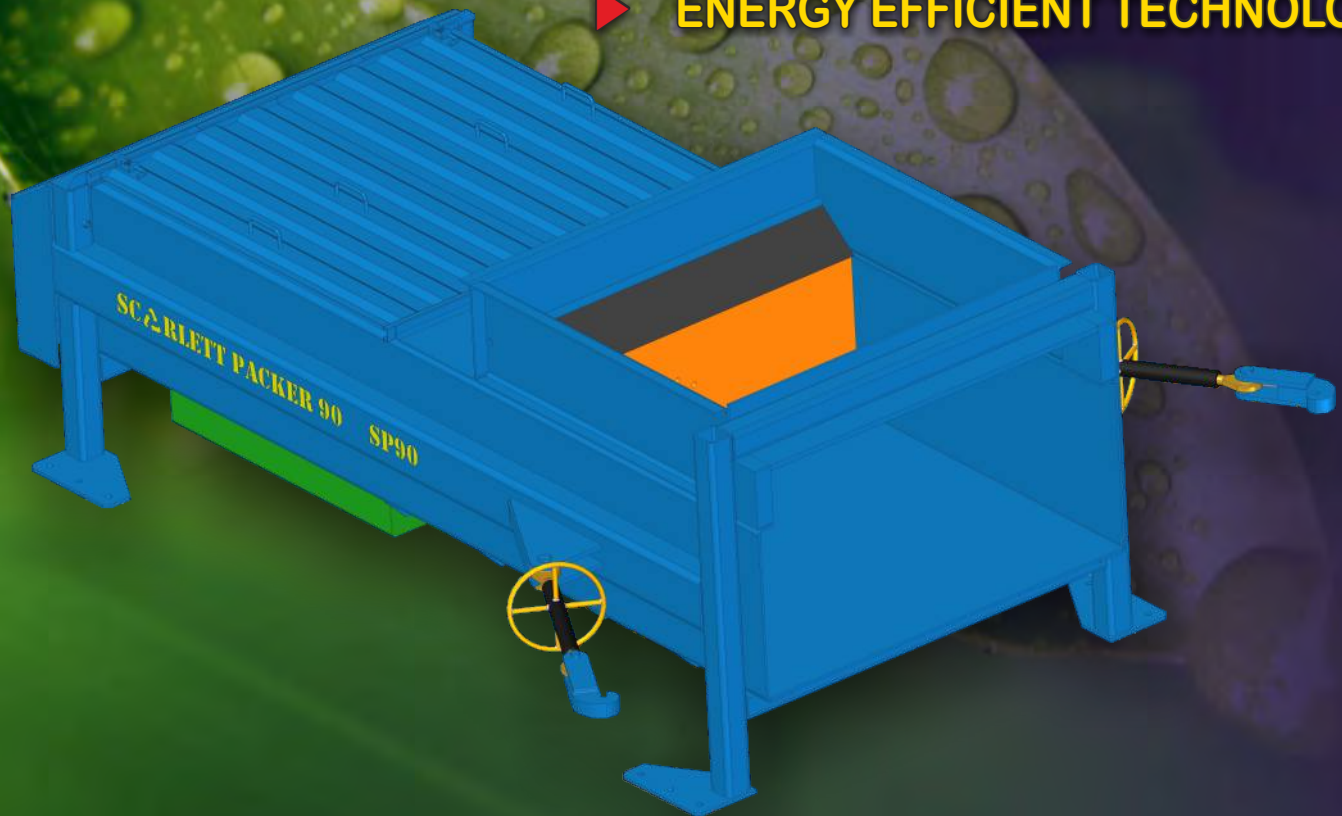

Designed for use in shopping centres used for light duty packing of recyclables mainly cardboard into solid waste containers.



www.scarlett.co.nz

Phone: 03 688 2900 Email: sales@scarlett.co.nz
Address: 4 Holmglen St, Washdyke, Timaru
PO Box 2070, Washdyke, Timaru 7941
New Zealand

Design, Specifications & Operation
may change without notice.
Please contact BJ Scarlett Ltd
for current information.

Scarlett Packer 90

SPECIFICATIONS

Packet Plate Face	1500mm x 610mm = 92m ²
Effective Displacement	1.2m ³ /stroke
Volume per Hour at Low Pressure	144m ³ /hour
Cycle Time	28 Seconds low pressure
Ram Force Adjustable to a maximum of	244kn @3500psi
Cylinder Stroke	1900mm
Cylinder Bore Diameter	4.5"- 114.3mm
Cylinder Shaft Diameter	3"- 76.2mm
Chamber Length	1300mm
Ram Penetration	590mm

HYDRAULIC POWER PACK

11 KW Electric Motor	1440 rpm
200 Litre Oil Reservoir	BP HLPZ 46
Solenoid Valve	
Horse Power & Load Sense controlled piston pump	
Hydraulic Pressure	- Max.3500psi

ELECTRICAL

Programmable Logic Controlled	
Proximity Switches	IP65 Rated
Push Buttons	IP65 Rated
Enclosures	IP65 Rated
Soft Start	
Hour meter	Optional
Cycle counter	Optional

ELECTRICAL REQUIREMENTS

415 Volt 3 Phase with earth and one neutral

Warning – Check with your local electricity supplier to see if a soft start is required on electric motors.

Phone: 03 688 2900

Email: sales@scarlett.co.nz

Address: 4 Holmglen St, Washdyke, Timaru
PO Box 2070, Washdyke, Timaru, 7941
New Zealand

www.scarlett.co.nz

